


DIAPHRAGM GAS METER



باورس کنترل

BAVERS CONTROL

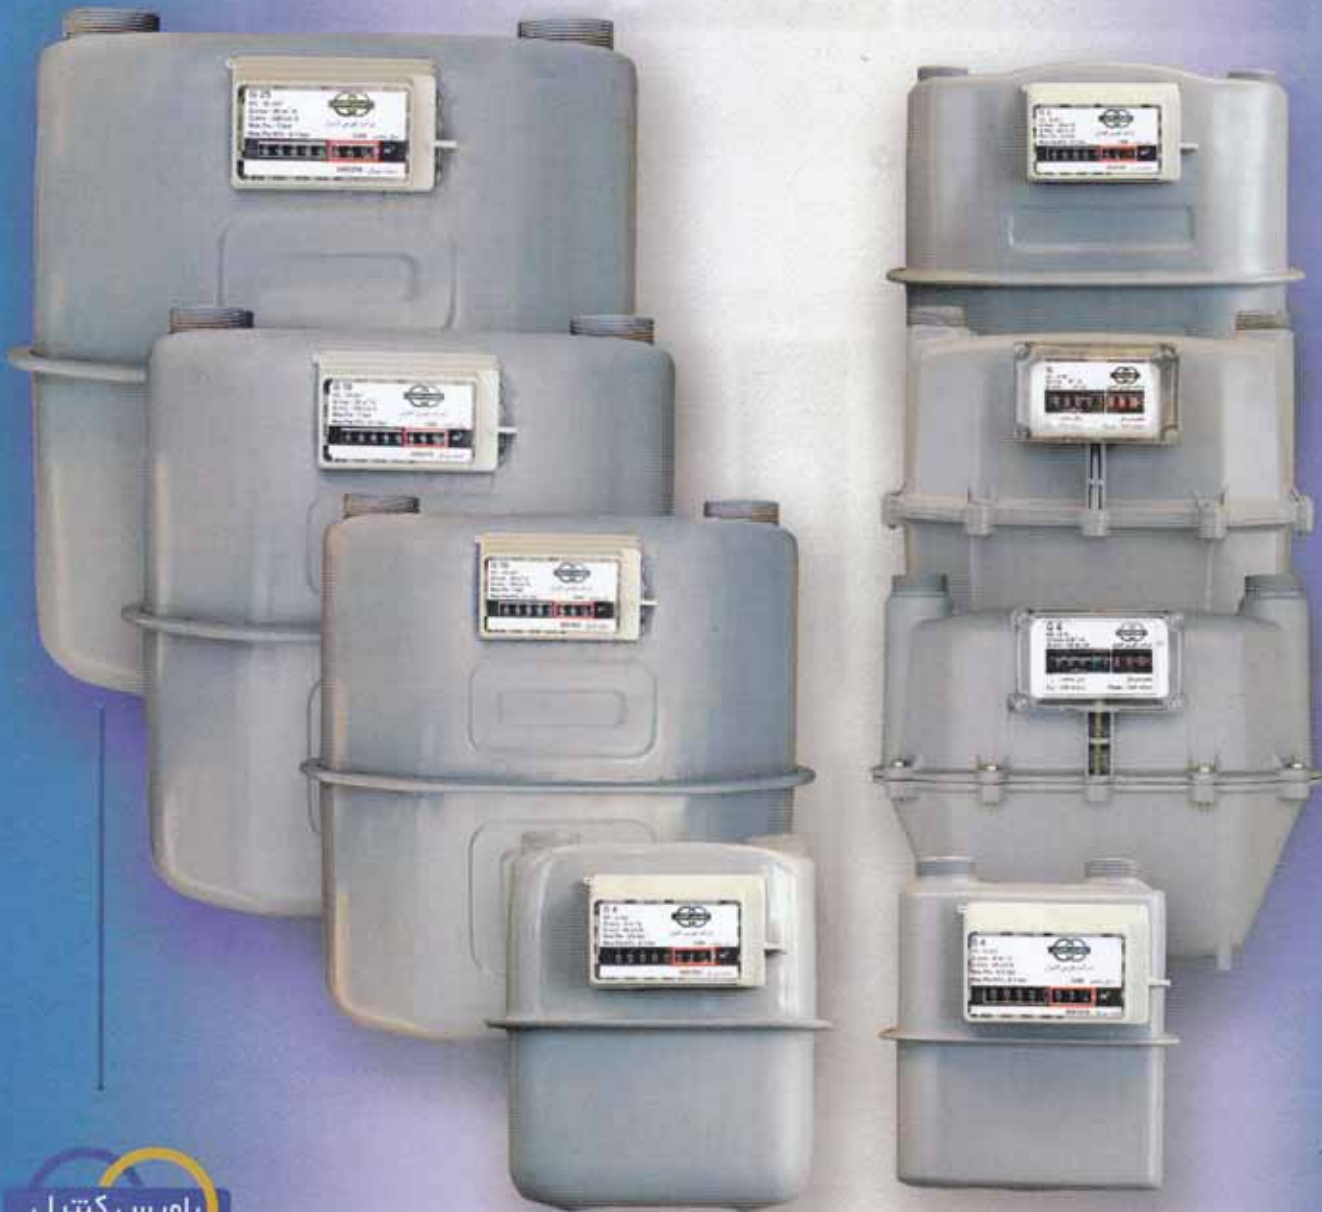

SANAYE GAZ IRAN

PRODUCT CATALOGUE

G4 - G160 SERIES

Technical Data

- ▷ Maximum 3% Accuracy
- ▷ Minimum Pressure Loss
- ▷ -29c to 60c Ambient Temperature
- ▷ Threaded / Flanged type connections

MODEL	Maximum Flow Rate	Minimum Flow Rate	Cyclic Volume	Max. Op. Pressure	Normal In. Pressure	Connection	Max. Pressure Loss
G4	6 m ³ /h	0.04 m ³ /h	1.2 dm ³	0.5 bar	18 mbar	Top - Threaded	2 mbar
G6	10 m ³ /h	0.06 m ³ /h	3 dm ³	0.5 bar	18 mbar	Top - Threaded	2 mbar
G10	16 m ³ /h	0.1 m ³ /h	10 dm ³	0.5 bar	18 mbar	Top - Threaded	2 mbar
G16	25 m ³ /h	0.16 m ³ /h	10 dm ³	0.5 bar	18 mbar	Top - Threaded	2 mbar
G25	40 m ³ /h	0.25 m ³ /h	30 dm ³	0.5 bar	18 mbar	Top - Threaded	3 mbar
G40	65 m ³ /h	0.4 m ³ /h	30 dm ³	0.5 bar	18 mbar	Side - Flange	3 mbar
G65	100 m ³ /h	0.65 m ³ /h	55 dm ³	0.5 bar	18 mbar	Side - Flange	4 mbar
G100	160 m ³ /h	1 m ³ /h	120 dm ³	0.5 bar	18 mbar	Side - Flange	4 mbar
G160	250 m ³ /h	1.6 m ³ /h	120 dm ³	0.5 bar	18 mbar	Side - Flange	4 mbar

باورس کنترل

BAVERS CONTROL



SANAYE GAZ IRAN

Central Office: No.36, Nourbakhsh st., Vali-e-Asr ave.
Tehran , IRAN. Tel:+9821-88800661,2 Fax:+9821-88892293

Bavers Control: KM.120 Tehran/Qazvin highway, Qazvin,
IRAN. TEL:+98282-2561145 FAX:+98282-2561149

Sanaye Gaz Iran:ALBORZ Industrial Town, Qazvin ,IRAN
TEL:+98282-2222633 FAX:+98282-2230685